

## PRODUCT DATASHEET

40W BACKLIT PANEL 600X600MM

PR-EMR-560022

### PRODUCT DESCRIPTION:

#### PURERENA 40W Backlit Panel 600 X 600 MM:

Saudi Made product.

60x60 recessed backlit LED panel for T-rail false ceilings.

Uniform lighting, ideal for commercial applications.


Complies with standard EN60598-1 and any other specific standards.



### PICTURES:



### DIMENSIONS:

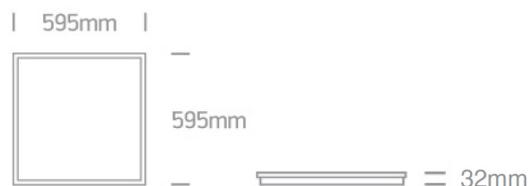

### PHYSICAL SPECIFICATIONS:

Item Group	40W Backlit Panel 600x600mm
Family	Panel Light
Order Code	PR-EMR-560022
LED Life Time	50,000 Hrs
Material	PS Diffuser housing
Diffuser Material	Acrylic
Warranty	5 Years
Dimensions	595*595*32 mm
Recessed T-Ceiling	Yes
Depth Required	60 mm
Indoor	Yes
Adjustable	No



**ELECTRICAL CHARACTERISTICS:**

<b>Gear</b>	External-Included
<b><i>FITTING + DRIVER:</i></b>	
<b>Input</b>	220-240V / 50-60HZ
<b>Safety Class</b>	
<b>Power (Watts)</b>	40W
<b>IP Rating</b>	IP20
<b>Light Source</b>	LED built in
<b>Dimmable</b>	No
<b>F Mark</b>	
<b><i>FITTING:</i></b>	
<b>Input Type</b>	Constant Current
<b>Input Current</b>	950mA
<b>Voltage</b>	36V
<b>Light Source</b>	LED built in
<b>LED Type</b>	SMD 2835
<b>LED Brand</b>	Philips Lumileds
<b>IP Rating</b>	IP20 (IP40 Optional)
<b><i>GEAR:</i></b>	
<b>Gear Type</b>	Led Driver Philips
<b>Input</b>	220-240V / 50-60HZ
<b>Power (Watts)</b>	40W
<b>Constant Current</b>	Yes
<b>IP Rating</b>	IP20
<b>Safety Class</b>	
<b>Dimmable</b>	No
<b>Housing Material</b>	Plastic
<b>Output Terminal</b>	Cable
<b>Cable Length</b>	30 CM



**ILLUMINATION DATA:**

<b>Lumen Output</b>	4400lm
<b>Light Efficiency</b>	110lm/W
<b>CRI</b>	>90
<b>Beam Angle</b>	120°
<b>UGR</b>	19

**PACKING INFO:**

<b>Box Weight</b>	1.85 Kg
<b>Pcs/Carton</b>	10
<b>Barcode</b>	FD-ET3
<b>HS Code</b>	9405114090

