




PRODUCT DESCRIPTION:

PURERENA LED Module Features:

- Modular and adjustable recessed LED luminaires
- Ideal for lighting walls
- Housing made of extruded aluminum
- High performance heatsink to minimize light decline



PICTURES:

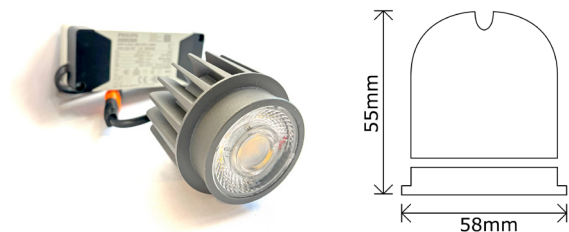

SCOPE OF APPLICATION:

Indoor outdoor stadium, tunnel, sport court, airport. Mine, wharf, square, street, warehouse, factory, parking lot, and halls

SPECIFICATIONS:

Nominal Wattage	18W
LED Chip	Bridgelux Chip
Nominal Voltage	AC220-240V
Main's Frequency	50/60 Hz
Power Factor	≥0.9
Color Temperature	3000K, 4000K
CRI	RA ≥80
Beam Angle	54°
Driver Brand	Philips
Size (mm)	ø58*H55mm
Trim Color	Black
Body Materials	Aluminum Body, Optical Lens

Temperature Range	-30 to +50 °C
Lifespan	30,000 Hrs.
Mounting Type	Recessed
Mounting Location	With down light housing
Dimmable	No
Lumens Efficiency	100lm/W
IP Rating	IP44
Warranty	5 Years