

## PRODUCT DATASHEET

### PRODUCT DESCRIPTION:

#### PURERENA LED Strip Light SMD Features:

- High light transmittance.
- Good protective performance.
- Good flexibility, and high substitutability.
- Outstanding weather & UV resistance.



### PICTURES:



### LED STRIP LIGHT SMD IP20



### SCOPE OF APPLICATION:

General indoor illumination, general outdoor illumination decorative illumination, and private living areas.

### SPECIFICATIONS:

Color	White
LED Chip	HongLi
Working Voltage	DC24V
Rated Power / M	4W/10W/14.4W
LED Qty/ M	480 LEDs
Color Temperature	2700K / 3000K / 4000K
CRI	RA ≥90
Lumen	90LM/W±10%@4000K
PCB Size	8mm
Max Running Length	5M
Cutting Length	5 CM (1 Unit)
Packing	5M Roll

Storing Temp.	-40 ~ 60 °C
Lifespan	50,000 Hrs.
2 PIN Connector	Included (1 PC)
Water Proof End Cap	N/A
Front Cap with Wire	Included (1 PC)
Silicon Glue	N/A
IP Rating	IP20
Extrusion Material	High Grade Silicon
Origin	China
Warranty	5 Years


PRODUCT DATASHEET

LED STRIP LIGHT SMD  
IP20


PRODUCT MODELS:

Model Number	Voltage	Wattage/M	Lumen/M	CCT	CRI	Cutting Unit
PR-STR4-SMD27-5M	DC24V	4W	100LM/W	2700K	RA>90	5 CM
PR-STR4-SMD30-5M	DC24V	4W	100LM/W	3000K	RA>90	5 CM
PR-STR4-SMD40-5M	DC24V	4W	100LM/W	4000K	RA>90	5 CM
PR-STR10-SMD27-5M	DC24V	10W	100LM/W	2700K	RA>90	5 CM
PR-STR10-SMD30-5M	DC24V	10W	100LM/W	3000K	RA>90	5 CM
PR-STR10-SMD40-5M	DC24V	10W	100LM/W	4000K	RA>90	5 CM
PR-STR14-SMD27-5M	DC24V	14.4W	100LM/W	2700K	RA>90	5 CM
PR-STR14-SMD30-5M	DC24V	14.4W	100LM/W	3000K	RA>90	5 CM
PR-STR14-SMD40-5M	DC24V	14.4W	100LM/W	4000K	RA>90	5 CM

PRODUCT SIZE:

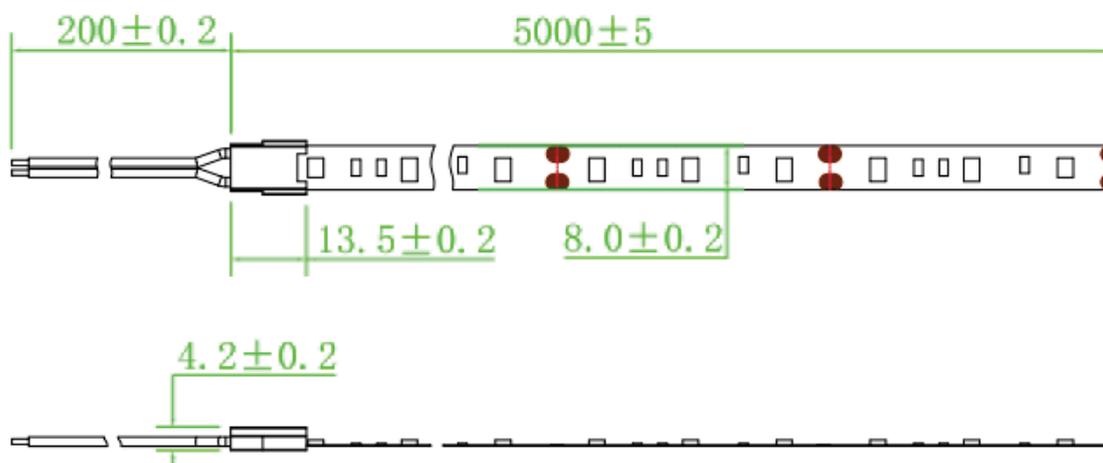


- Section diagram



#### PHOTOELECTRIC PARAMETERS:

- Colour Temperature Chart

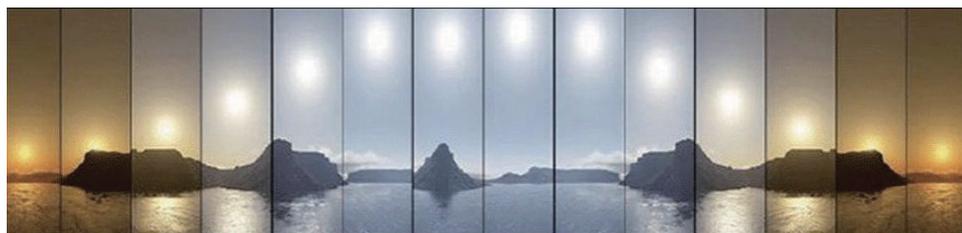


2200K

4000K

6500K

4000K

2200K

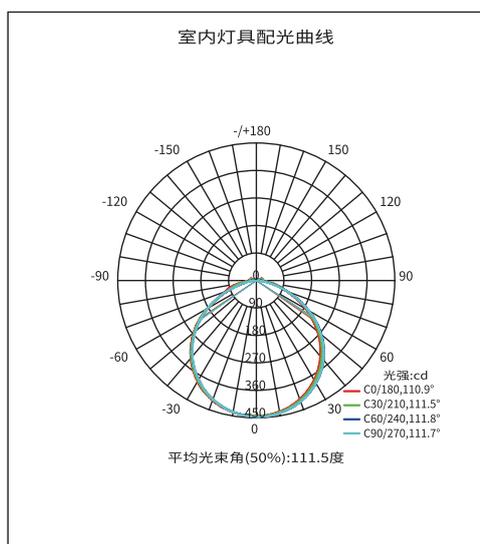

- Lux Chart

光通输出:929.7 lm

